

## 1 W BTL MONO AUDIO AMPLIFIER

### GENERAL DESCRIPTION

The TDA7052 is a mono output amplifier in a 8-lead dual-in-line (DIL) plastic package. The device is designed for battery-fed portable audio applications.

#### Features:

- No external components
- No switch-on or switch-off clicks
- Good overall stability
- Low power consumption
- No external heatsink required
- Short-circuit proof

### QUICK REFERENCE DATA

| parameter                 | conditions            | symbol    | min. | typ. | max. | unit |
|---------------------------|-----------------------|-----------|------|------|------|------|
| Supply voltage range      |                       | $V_P$     | 3    | 6    | 18   | V    |
| Total quiescent current   | $R_L = \infty$        | $I_{tot}$ | —    | 4    | 8    | mA   |
| Voltage gain              |                       | $G_V$     | 38   | 39   | 40   | dB   |
| Output power              | THD = 10%; 8 $\Omega$ | $P_O$     | —    | 1,2  | —    | W    |
| Total harmonic distortion | $P_O = 0,1$ W         | THD       | —    | 0,2  | 1,0  | %    |

### PACKAGE OUTLINE

8-lead DIL; plastic (SOT97).

7110826 0081979 791

July 1994

1873

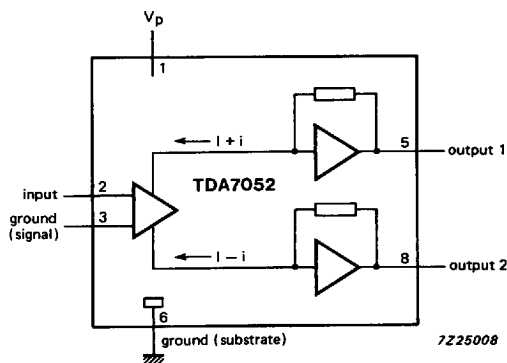


Fig. 1 Block diagram.

**PINNING**

|   |                |                 |   |      |                    |
|---|----------------|-----------------|---|------|--------------------|
| 1 | V <sub>p</sub> | supply voltage  | 5 | OUT1 | output 1           |
| 2 | IN             | input           | 6 | GND2 | ground (substrate) |
| 3 | GND1           | ground (signal) | 7 | n.c. | not connected      |
| 4 | n.c.           | not connected   | 8 | OUT2 | output 2           |

## FUNCTIONAL DESCRIPTION

The TDA7052 is a mono output amplifier designed for battery-fed portable audio applications, such as tape recorders and radios.

The gain is fixed internally at 40 dB. A large number of tape recorders and radios are still designed for mono sound, plus a space-saving trend by reduction of the number of battery cells. This means a decrease in supply voltage which results in an reduction of output power. To compensate for this reduction, the TDA7052 uses the Bridge-Tied-Load principle (BTL) which can deliver an output power of 1,2 W (THD = 10%) into an 8  $\Omega$  load with a power supply of 6 V. The load can be short-circuited at each signal excursion.

## RATINGS

Limiting values in accordance with the Absolute Maximum System (IEC 134)

| parameter                          | symbol    | min.       | max.  | unit               |
|------------------------------------|-----------|------------|-------|--------------------|
| Supply voltage                     | $V_P$     | —          | 18    | V                  |
| Non-repetitive peak output current | $I_{OSM}$ | —          | 1,5   | A                  |
| Total power dissipation            | $P_{tot}$ | see Fig. 2 |       |                    |
| Crystal temperature                | $T_C$     | —          | 150   | $^{\circ}\text{C}$ |
| Storage temperature range          | $T_{stg}$ | -55        | + 150 | $^{\circ}\text{C}$ |

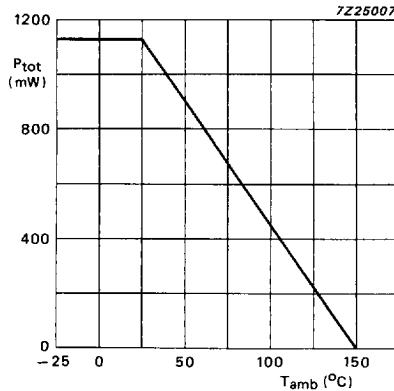


Fig. 2 Power derating curve.

## POWER DISSIPATION

Assume  $V_P = 6$  V;  $R_L = 8$   $\Omega$ ;  $T_{amb} = 50$   $^{\circ}\text{C}$  maximum.

The maximum sinewave dissipation is 0,9 W.

$$R_{thj-a} = \frac{150 - 50}{0,9} \approx 110 \text{ K/W.}$$

Where  $R_{thj-a}$  of the package is 110 K/W, so no external heatsink is required.

**CHARACTERISTICS**

$V_p = 6\text{ V}$ ;  $R_L = 8\ \Omega$ ;  $f = 1\text{ kHz}$ ;  $T_{\text{amb}} = 25\text{ }^\circ\text{C}$ ; unless otherwise specified.

| parameter                              | conditions               | symbol               | min. | typ.               | max. | unit             |
|--|--------------------------|----------------------|------|--------------------|------|------------------|
| <b>Supply</b>                          |                          |                      |      |                    |      |                  |
| Supply voltage range                   |                          | $V_p$                | 3    | 6                  | 18   | V                |
| Total quiescent current                | $R_L = \infty$           | $I_{\text{tot}}$     | —    | 4                  | 8    | mA               |
| Voltage gain                           |                          | $G_v$                | 38   | 39                 | 40   | dB               |
| Output power                           | THD = 10%                | $P_o$                | —    | 1,2                | —    | W                |
| Noise output voltage<br>(RMS value)    | note 1                   | $V_{\text{no(rms)}}$ | —    | 150                | 300  | $\mu\text{V}$    |
|  | note 2                   | $V_{\text{no(rms)}}$ | —    | 60                 | —    | $\mu\text{V}$    |
| Frequency response                     |                          | $f_r$                | —    | 20 Hz to<br>20 kHz | —    | Hz               |
| Supply voltage ripple rejection        | note 3                   | SVRR                 | 40   | 50                 | —    | dB               |
| DC output offset voltage<br>pin 5 to 8 | $R_S = 5\text{ k}\Omega$ | $\Delta V_{5-8}$     | —    | —                  | 100  | mV               |
| Total harmonic distortion              | $P_o = 0,1\text{ W}$     | THD                  | —    | 0,2                | 1,0  | %                |
| Input impedance                        |                          | $ Z_i $              | —    | 100                | —    | $\text{k}\Omega$ |
| Input bias current                     |                          | $I_{\text{bias}}$    | —    | 100                | 300  | nA               |

**Notes to the characteristics**

1. The unweighted RMS noise output voltage is measured at a bandwidth of 60 Hz to 15 kHz with a source impedance ( $R_S$ ) of 5 k $\Omega$ .
2. The RMS noise output voltage is measured at a bandwidth of 5 kHz with a source impedance of 0  $\Omega$  and a frequency of 500 kHz. With a practical load ( $R = 8\ \Omega$ ;  $L = 200\ \mu\text{H}$ ) the noise output current is only 100 nA.
3. Ripple rejection is measured at the output with a source impedance of 0  $\Omega$  and a frequency between 100 Hz and 10 kHz. The ripple voltage = 200 mV (RMS value) is applied to the positive supply rail.

APPLICATION INFORMATION

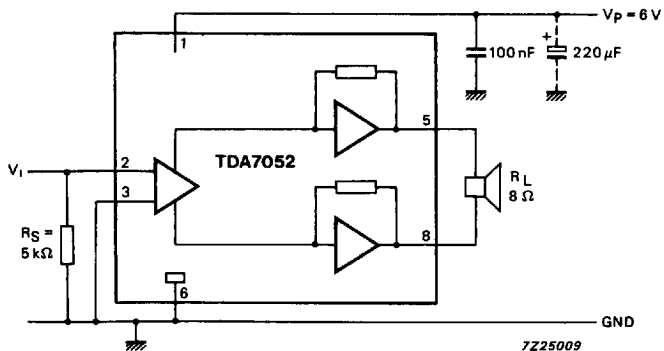


Fig. 3 Application diagram.